


ELECTRO-PROPORTIONAL VALVES—FLOW CONTROLS

ZL72-36 Proportional, Bi-Directional Flow Control,

U.S. Patent
6,116,263

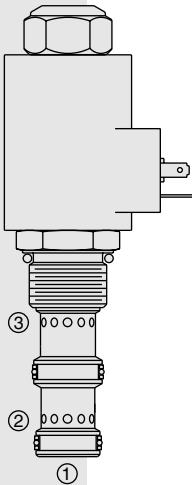

DESCRIPTION

A solenoid-operated, electrically-variable, three-port, pressure-compensated, spool-type, normally closed when de-energized, proportional, bi-directional, priority-type flow control valve.

OPERATION

The ZL72-36 provides priority regulated flow to port ③ with input at port ①, and bypass at port ②; or regulated flow from port ③ to port ② with input at port ① blocked. Regulated flow is proportional to electric current applied to the solenoid.


Application Notes: The ZL72-36 may be used for single-acting cylinder applications where lowering is provided by gravity force. There are no minimum load restrictions, provided the load is enough to overcome cylinder friction and other frictions in the system. At low load the lowering speed can be slower than at heavier load if pressure drop is less than the compensation value of the valve.

The hydraulic circuit must include a check valve and a poppet-type solenoid valve (SV10-20 type) connected as shown on the circuit symbol and placed close to the ZL72-36 valve, if possible in the same manifold. See Application Guide.


Operation of Manual Override: To Engage: Turn clockwise approximately 1 turn to reach start point. Continue another approximately 5 turns to full shift. To Disengage: Turn counterclockwise approximately 6 turns until positive stop is found.

SYMBOLS

USASI/ISO:

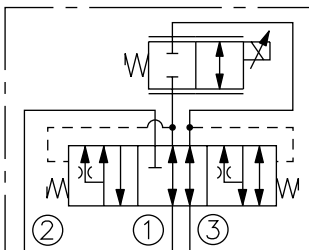

ABBREVIATED SYMBOL:



FEATURES

- Excellent linearity and hysteresis.
- Hardened spool and cage for long life.
- Efficient wet armature construction.
- Optional coil voltages and terminations.
- Manual override option.

RATINGS

Maximum Operating Pressure: 240 bar (3500 psi)

Regulated Flow: 0-45 lpm (0-12 gpm)

Internal Leakage: 0.38 lpm (0.10 gpm) at zero current

Electrical: 2 standard voltage ratings

Coil Voltage	Resistance @ 20°C	Threshold Current	Max. Control Current
12 VDC	4.7 ohms	300 ± 100 mA	1600 ± 100 mA
24 VDC	19.0 ohms	150 ± 50 mA	800 ± 50 mA

Temperature: -40 to 120°C with Buna N seals

Filtration: See page 9.010.1

Fluids: Mineral-based or synthetics with lubricating properties at viscosities of 7.4 to 420 cSt (50 to 2000 ssu)

Installation: No restrictions; See page 9.020.1.



Cavity: VC12-3; See page 9.112.1; **Cavity Tool:** CT12-3X-XX; See page 8.600.1

Seal Kit: SK12-3X-MM; See page 8.650.1

PERFORMANCE

Recommended Controllers (See Section 3)


Input Sig. w/12V Coil	DIN Coil Mount	PCB Board	Metal Box	DIN Rail Mount
0-5 VDC	7114950	4000046	4000049	4000136
0-10 VDC	4000070	4000141	4000124	4000137
4-20 mA	4000123	4000143	4000130	4000139
PWM	—	4000144	4000133	4000140
w/24V Coil				
0-5 VDC	4000161	4000194	4000174	4000136
0-10 VDC	4000165	4000141	4000182	4000137
4-20 mA	4000169	4000143	4000186	4000139
PWM	—	4000144	4000133	4000140

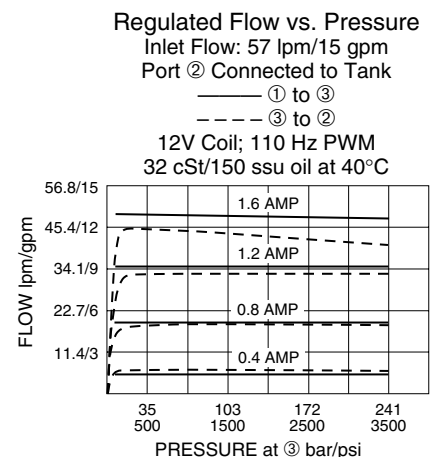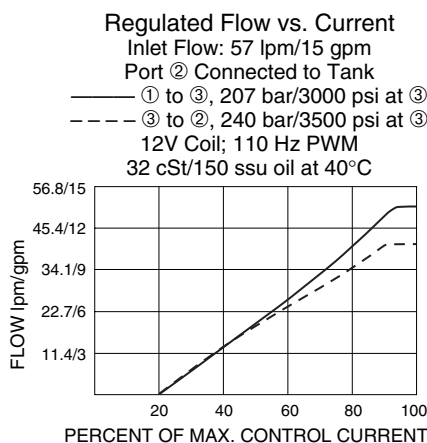

Normally Closed

ZL72-36

DIMENSIONS

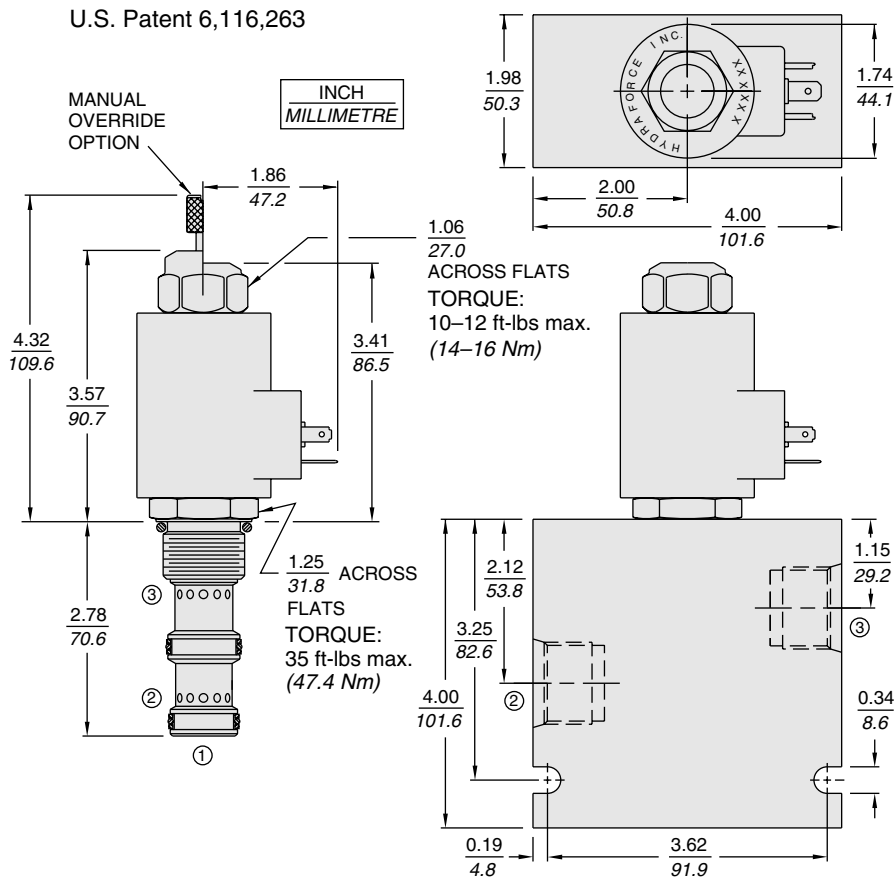

MATERIALS

Cartridge: Weight: 0.34 kg. (0.7 lbs.); Steel with hardened work surfaces. Zinc-plated exposed surfaces. Buna N O-rings and polyester elastomer back-ups standard.

Standard Ported Body: Weight: 0.98 kg. (2.15 lbs.); Anodized high-strength 6061 T6 aluminum alloy, rated to 240 bar (3500 psi); See page 8.012.1. Steel bodies available; consult factory.

Coil: Weight: 0.32 kg. (0.7 lbs.); Unitized thermoplastic encapsulated, Class H high temperature magnet-wire; See page 3.200.1.

TO ORDER

ZL72-36		-	-	-	-	-	-
Option(s)							
None (Blank)							
Manual Override	M						
Porting							
Cartridge Only	0						
SAE 10	10T						
SAE 12	12T						
SAE 16	16T						
Terminations (VDC)							
DS	Dual Spades						
DG	DIN 43650						
DL	Leadwires (2)						
DL/W	Leads w/Weatherpak® Connectors						
DR	Deutsch DT04-2P						
Voltage							
0	Less Coil						Coils with internal diode are available. Consult factory.
12	12 VDC						
24	24 VDC						
Seals							
N	Buna N (Std.)						
V	Fluorocarbon						