
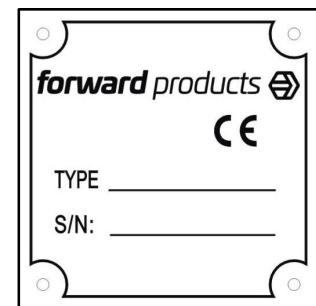

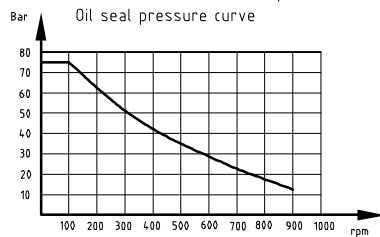
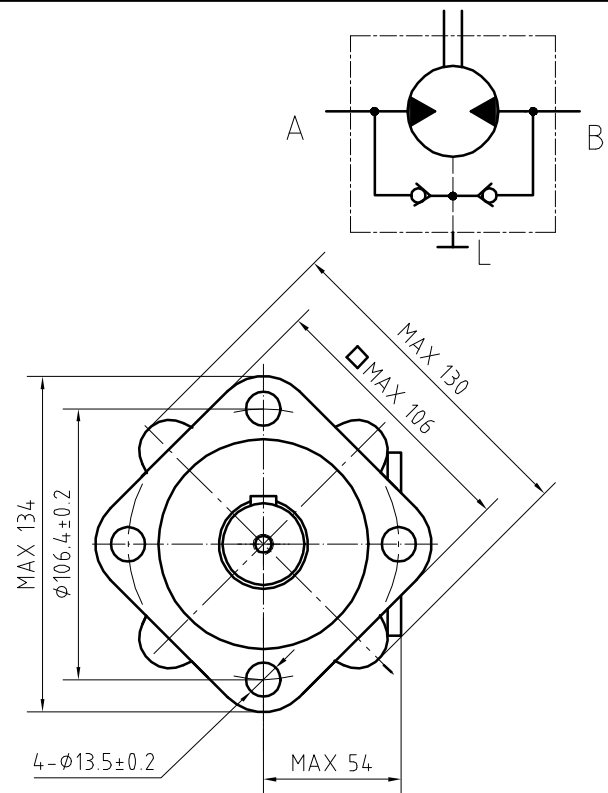


REQUIRED CONTAMINATION CLASS	ISO 4406 class 20/18/15
OPERATING TEMPERATURE RANGE	-20° to +90°C

INLET	DIRECTION
A	RIGHT
B	LEFT

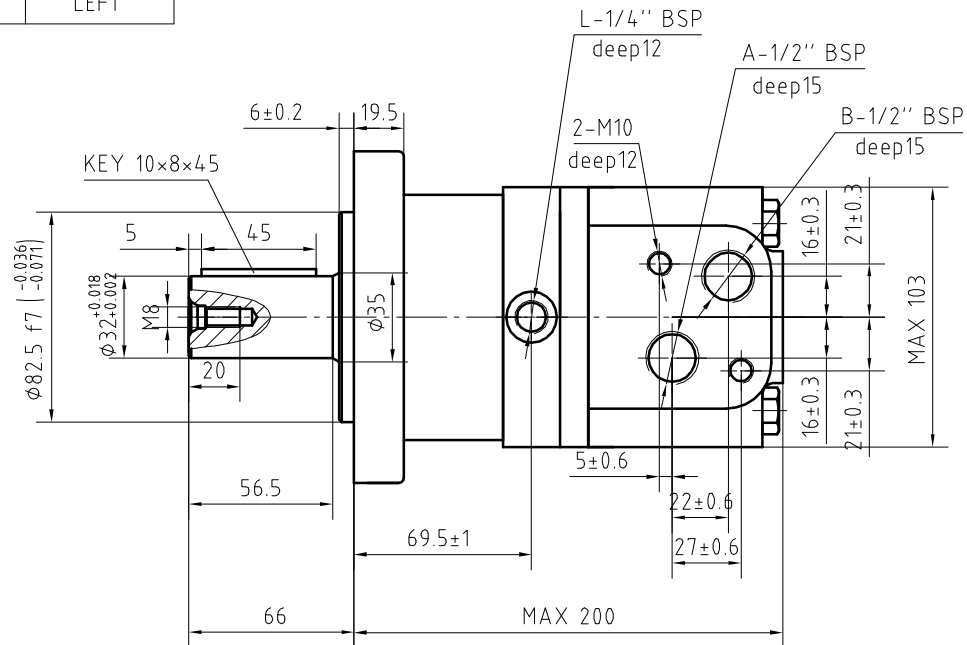

PRESSURE(bar)		
CONTINUOUS	INTERMITTENT	PEAK
180	200	220
Type:Geroller		

Max allowed back-pressure or drain pressure: 50bar
 Max allowed torque: 606Nm
 Max speed: 295rpm

PAINTING COLOUR: BLACK
 PAINTING THICKNESS RANGE: 0.04mm-0.06mm
 SHAFT: MAGNESIUM PHOSPHATED

forward products	Date 08.03.2019
Nom.Displacement 250cc/rmp	
FP-MS250-4H-CY32-01	