


BS STANDARD CONNECTIONS

M20512/M20513

**BSP FEMALE 60° CONE
BS5200 / ISO 12151-6**

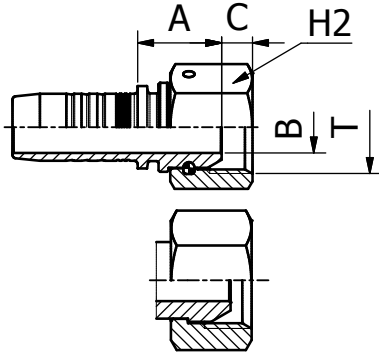


| PART. REF. | HOSE BORE | | | Thread | DIMENSIONS mm | | | |
|--------------|-----------|------|-------|-----------|---------------|------|------|------|
| | DN | Dash | inch | | T | B | A | C |
| M20512-03-02 | 5 | - 3 | 3/16" | 1/8" - 28 | 3.0 | 16.0 | 4.4 | 14.0 |
| M20512-04-02 | 6 | - 4 | 1/4" | 1/8" - 28 | 3.1 | 16.5 | 4.4 | 14.0 |
| M20512-05-04 | 8 | - 5 | 5/16" | 1/4" - 19 | 4.1 | 17.5 | 4.2 | 19.0 |
| M20512-06-04 | 10 | - 6 | 3/8" | 1/4" - 19 | 4.1 | 18.0 | 4.2 | 19.0 |
| M20512-08-06 | 12 | - 8 | 1/2" | 3/8" - 19 | 7.1 | 21.0 | 6.0 | 22.0 |
| M20512-08-10 | 12 | - 8 | 1/2" | 5/8" - 14 | 12.1 | 22.0 | 10.2 | 28.0 |
| M20512-08-12 | 12 | - 8 | 1/2" | 3/4" - 14 | 15.0 | 24.5 | 9.0 | 32.0 |
| M20512-10-08 | 16 | - 10 | 5/8" | 1/2" - 14 | 9.8 | 24.0 | 6.5 | 27.0 |
| M20512-10-10 | 16 | - 10 | 5/8" | 5/8" - 14 | 12.5 | 21.5 | 10.2 | 28.0 |
| M20512-10-12 | 16 | - 10 | 5/8" | 3/4" - 14 | 15.0 | 23.0 | 9.0 | 32.0 |
| M20512-12-08 | 19 | - 12 | 3/4" | 1/2" - 14 | 9.8 | 25.0 | 6.5 | 27.0 |
| M20512-12-12 | 19 | - 12 | 3/4" | 3/4" - 14 | 15.0 | 24.5 | 9.0 | 32.0 |
| M20512-12-16 | 19 | - 12 | 3/4" | 1" - 11 | 19.8 | 26.0 | 10.5 | 38.0 |
| M20512-16-12 | 25 | - 16 | 1" | 3/4" - 14 | 15.0 | 25.5 | 9.0 | 32.0 |
| M20512-16-16 | 25 | - 16 | 1" | 1" - 11 | 19.8 | 27.5 | 10.5 | 38.0 |
| M20513-03-04 | 5 | - 3 | 3/16" | 1/4" - 19 | 4.0 | 16.5 | 5.4 | 19.0 |
| M20513-04-04 | 6 | - 4 | 1/4" | 1/4" - 19 | 4.0 | 17.0 | 5.4 | 19.0 |
| M20513-04-06 | 6 | - 4 | 1/4" | 3/8" - 19 | 7.0 | 19.0 | 6.0 | 22.0 |
| M20513-04-08 | 6 | - 4 | 1/4" | 1/2" - 14 | 9.5 | 19.5 | 6.3 | 27.0 |
| M20513-05-06 | 8 | - 5 | 5/16" | 3/8" - 19 | 7.0 | 19.0 | 6.0 | 22.0 |
| M20513-05-08 | 8 | - 5 | 5/16" | 1/2" - 14 | 9.3 | 20.5 | 6.3 | 27.0 |
| M20513-06-06 | 10 | - 6 | 3/8" | 3/8" - 19 | 7.0 | 19.5 | 6.0 | 22.0 |
| M20513-06-08 | 10 | - 6 | 3/8" | 1/2" - 14 | 9.3 | 20.0 | 6.3 | 27.0 |
| M20513-08-08 | 12 | - 8 | 1/2" | 1/2" - 14 | 9.3 | 20.5 | 6.3 | 27.0 |

117 FITTINGS

BS STANDARD CONNECTIONS

M20511KR

**BSP FEMALE 60° CONE
BS5200 / ISO 12151-6**

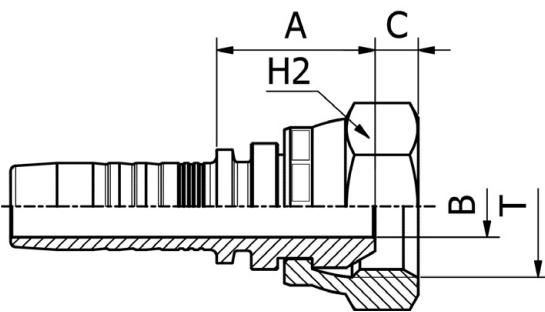

| PART. REF. | HOSE BORE | | | Thread | DIMENSIONS mm | | | |
|----------------|-----------|------|------|-----------|---------------|------|-----|------|
| | DN | Dash | inch | | T | B | A | C |
| M20511-04-04KR | 6 | - 4 | 1/4" | 1/4" - 19 | 4.0 | 20.0 | 5.2 | 19.0 |
| M20511-06-06KR | 10 | - 6 | 3/8" | 3/8" - 19 | 7.0 | 22.0 | 6.0 | 22.0 |
| M20511-08-08KR | 12 | - 8 | 1/2" | 1/2" - 14 | 9.3 | 24.0 | 6.5 | 27.0 |